

**liftex**<sup>®</sup>  
the world's best slings



The most trusted name in slings since 1955

Your Authorized Liftex Distributor:

---

**McLAUGHLIN HOIST & CRANE**

---

(636)343-9700

[www.StLCrane.com](http://www.StLCrane.com)

## PAC-Slings™

# Premium Alloy Chain for High Heat & High Abrasion Applications

**lifetex® Pac-Flex™**, Premium Alloy Chain Mesh Slings are specified for multiple lifting uses in metalworking and other applications where the loads are abrasive, hot or will tend to cut other types of slings. Pac-Flex™ is a uniquely engineered and patented arrangement of alloy steel chain and 1/8" wire rope. End fittings are heat treated alloy steel. Pac-Flex™ fills a niche that web slings, even wire mesh slings cannot fill. In fact, Pac-Flex™ is vastly superior in many aspects to the wire mesh sling.



### PAC-FLEX™ – ALLOY CHAIN MESH SLINGS

Patented combination of alloy steel chain and 1/8" wire rope


- Standard duty features 7/32 chain
  - Heavy Duty features 5/16 chain
- End fittings are heat treated alloy steel

### PAC-FLEX™ SLING FEATURES

- Flat, smoother bearing surfaces than wire mesh
- Higher tensile strength alloy steel chain
- Flexibility to conform to irregular shapes
- Withstands temperatures to 400°F
- Excellent resistance to abrasion and cutting
- Easy to inspect – use the same inspection criteria used for other alloy chain slings
- Easy to repair – each individual component can be repaired or replaced by Lifetex® as needed to reduce costs

### PAC-FLEX™ VS. WIRE MESH SLINGS

- Our 2" wide sling is 260% stronger than 2" wide wire mesh
- Our 4" wide sling is 200% stronger than 4" wire mesh slings
- Bi-Directional Flexibility: means better load control and longer sling life

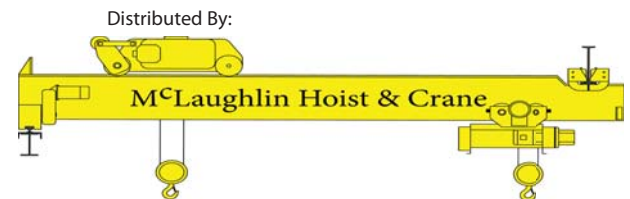


**PAC-FLEX CHAIN MESH SLING CAPACITIES & SPECIFICATIONS**


Sling Type	Part #	Nominal Sling width	Rated Capacity (lbs)			Approx Weight (lbs)	
			Choker	Vertical	Basket	3' Sling	1' Body
Type II	PAC-4B	2"	-	6000	12000	7.9	1.8
Type I	PAC-4C	2"	6000	6000	12000	9.4	1.8
Type II	PAC-7B	4"	-	10000	20000	13.1	3.2
Type I	PAC-7C	4"	10000	10000	20000	15.2	3.2
Type II	PAC-5B/HD	4"	-	18000	36000	18.6	4.3
Type I	PAC-5C/HD	4"	18000	18000	36000	22.1	4.3
Type II	PAC-8B/HD	6"	-	30000	60000	26.8	6.3
Type I	PAC-8C/HD	6"	30000	30000	60000	31.9	6.3

**PAC-FLEX FITTING DIMENSIONS (IN INCHES)**

	A1	A2	B	D	Thickness
PAC-4	6.88	4.75	3.50	2.25	0.75
PAC-7	8.50	6.25	4.25	3.25	0.75
PAC-5HD	12.00	9.19	7.13	3.63	1.00
PAC-8HD	12.75	9.75	6.82	4.75	1.00

**HOW TO ORDER**  
 Specify on Purchase Order:  
 •Sling Width  
 •Sling Length  
 (pull to pull – see illustration)  
 •Part Number

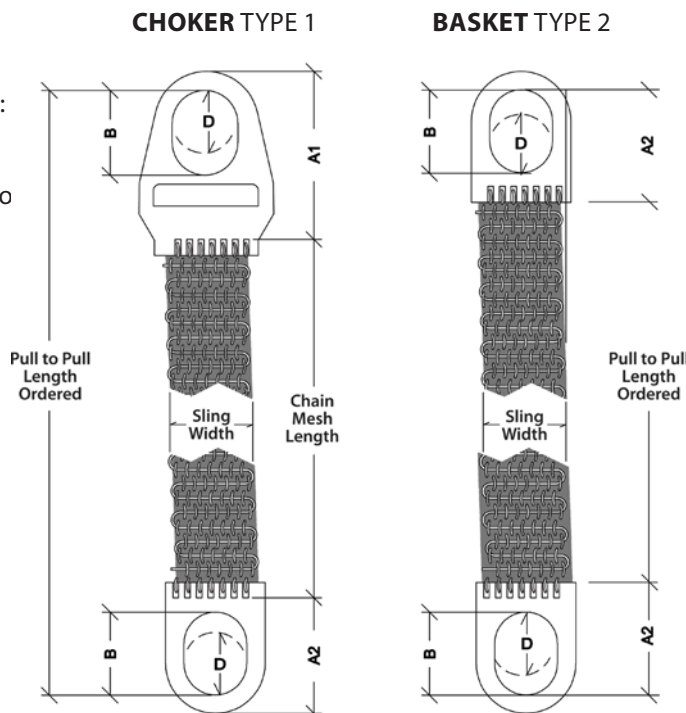



**WARNING**

SLING FAILURE CAN CAUSE  
**DEATH OR INJURY**  
 SLING FAILURE RESULTS FROM MISUSE, DAMAGE, AND EXCESSIVE WEAR

ADHERE TO INDUSTRY STANDARDS & REGULATIONS