

# WEAR-FLEX

## Protective Nylon Slings

Distributed By:

**McLaughlin Hoist & Crane**

Fenton, Missouri

(636)343-9700


[www.StLCrane.com](http://www.StLCrane.com)



# SAFE-EDGE PROTECTIVE NYLON SLINGS

Safe-Edge Slings are designed to help resist edge cuts and abrasion. They are woven with impregnated nylon webbing throughout the body and specialty yarns on the edges. Independent laboratory tests have shown Safe-Edge Slings to last up to 40% longer than standard web slings.

## ENDLESS (EN)

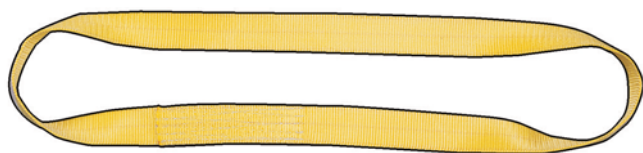

TYPE V

## EYE AND EYE (EE)



STRAIGHT EYE TYPE III




TWIST EYE TYPE IV

Safe-Edge Endless Slings are the most versatile for use in vertical, choker and basket hitches. Legs can be spread for extra stability. Multiple wear points allow for extended sling life.

Safe-Edge Eye and Eye Slings are ideal slings for use in choker, vertical and basket hitches. Straight eyes are standard. Twist eye design adapts well to choker hitches. Slings three inches or wider have eyes tapered to 1/2 the body width.

Order by Stock No. and Length	Sling Width Inches	Rated Capacity-Lbs.			User List Price	
		Choker @ 30°	Vertical @ 90°	Basket @ 90°	3 Foot Base Price	Adder Per Foot
EN1-0901SE	1"	2480	3100	6200	\$14.25	\$2.25
EN2-0901SE	1"	4960	6200	12400	28.45	4.85
EN1-0902SE	2"	4960	6200	12400	21.20	3.80
EN2-0902SE	2"	10000	12500	25000	42.15	7.90
EN1-0903SE	3"	7520	9400	18800	36.35	6.10
EN2-0903SE	3"	15040	18800	37600	62.50	12.20
EN1-0904SE	4"	10000	12500	25000	44.15	7.50
EN2-0904SE	4"	20000	25000	50000	80.95	15.50
EN1-0906SE	6"	15040	18800	37600	65.80	12.90
EN2-0906SE	6"	30080	37600	75200	132.30	28.60

Order by Stock No. and Length	Sling Width Inches	Eye Length Inches	Eye Width Inches	Rated Capacity-Lbs.			User List Price	
				Choker @ 30°	Vertical @ 90°	Basket @ 90°	3 Foot Base Price	Adder Per Foot
EE1-0901SE	1"	10"	1"	1200	1500	3000	\$14.80	\$.95
EE2-0901SE	1"	10"	1"	2480	3100	6200	17.70	2.40
EE1-0902SE	2"	10"	2"	2480	3100	6200	23.05	1.90
EE2-0902SE	2"	10"	2"	4960	6200	12400	25.95	4.00
EE1-0903SE	3"	12"	1 1/2"	3760	4700	9400	39.20	2.80
EE2-0903SE	3"	12"	1 1/2"	7520	9400	18800	43.35	5.90
EE1-0904SE	4"	12"	2"	4960	6200	12400	48.35	3.35
EE2-0904SE	4"	12"	2"	10000	12500	25000	55.90	7.95
EE1-0906SE	6"	14"	3"	7520	9400	18800	76.15	6.35
EE2-0906SE	6"	14"	3"	15040	18800	37600	84.85	13.30

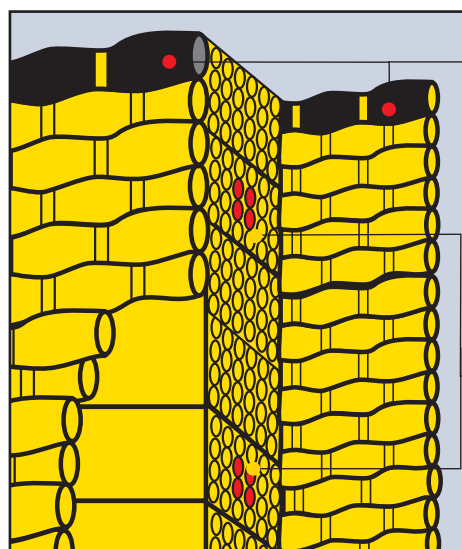

## SAFE-EDGE PROTECTIVE NYLON SLINGS – THE BETTER CHOICE

### EXTRA EDGE PROTECTION

Specialty woven yarns offering EXTRA EDGE PROTECTION to resist edge cuts and abrasion.

### RED "SAFETY ALERT" YARNS

Safe-Edge Slings have red inner warning yarns that show when the outer jacket is cut or damaged exposing the inner load carrying yarns.

# SAFE-EDGE PROTECTIVE NYLON SLINGS

## TRIANGLE-TRIANGLE (TT)



TYPE II

Safe-Edge Triangle-Triangle Slings are used for vertical and basket lifting. End fittings are alloy steel.

Order by Stock No. and Length	Body Width Inches	Rated Capacity – Lbs			User List Price	
		Choker @ 30°	Vertical @ 90°	Basket @ 90°	3 Foot Base Price	Adder Per Foot
TT1-0902SE	2"	–	3100	6200	\$51.15	\$1.90
†TT2-0902SE	2"	–	6200	12400	53.85	4.00
TT1-0903SE	3"	–	4700	9400	79.15	2.80
†TT2-0903SE	3"	–	9400	18800	81.80	5.90
TT1-0904SE	4"	–	6200	12400	98.35	3.35
†TT2-0904SE	4"	–	12500	25000	105.55	7.95
TT1-0906SE	6"	–	9400	18800	169.80	6.35
†TT2-0906SE	6"	–	18800	37600	184.90	13.30

## TRIANGLE-CHOKER (TC)



TYPE I

Safe-Edge Triangle-Choker Slings are used for choker and basket lifting. End fittings are alloy steel.

Order by Stock No. and Length	Body Width Inches	Rated Capacity–Lbs			User List Price	
		Choker @ 30°	Vertical @ 90°	Basket @ 90°	3 Foot Base Price	Adder Per Foot
TC1-0902SE	2"	2480	3100	6200	\$61.05	\$1.90
†TC2-0902SE	2"	4960	6200	12400	63.65	4.00
TC1-0903SE	3"	3760	4700	9400	87.25	2.80
†TC2-0903SE	3"	7520	9400	18800	93.90	5.90
TC1-0904SE	4"	4960	6200	12400	116.80	3.35
†TC2-0904SE	4"	10000	12500	25000	121.55	7.95
TC1-0906SE	6"	7520	9400	18800	203.70	6.35
†TC2-0906SE	6"	15040	18800	37600	210.35	13.30

Note: Aluminum fittings are available upon request except for those marked with a †. Do not use in applications involving alkalis, acids or caustics. Three and four ply slings are also available upon request.

## WEBBING REPLACEMENT

To help control costs, Wear-Flex can reweb existing fittings. We do require inspection of the fittings prior to the web replacement to determine if the fittings are reusable. Slings will then be proof tested to twice their rated capacity in compliance with OSHA and ASME B30.9 Standards. A Certificate of Conformance will be supplied upon request.

## WARNING!

DO NOT EXCEED RATED CAPACITIES. REFER TO SLING LOAD CHART ON PAGE 5 FOR RATED CAPACITIES AT OTHER SLING-TO-LOAD ANGLES.

## SAFE-EDGE NYLON TOW STRAPS

Safe-Edge Tow Straps are ideal for truck, emergency and off-road vehicles. Manufactured from strong, lightweight, weather resistant, edge protected nylon webbings; they do not rust, kink or mar like chain or cable.



Order by Stock No. and Length	Dimensions Width (In.) x Length (Ft)	Web Tensile Lbs	User List Price
TS1-9220SE	2" x 20 Ft	20000	\$33.30
TS1-9230SE	2" x 30 Ft	20000	43.95
TS2-9220SE	2" x 20 Ft	40000	62.70
TS2-9230SE	2" x 30 Ft	40000	86.85
TS1-9320SE	3" x 20 Ft	30000	64.50
TS1-9330SE	3" x 30 Ft	30000	81.65
TS2-9320SE	3" x 20 Ft	60000	105.70
TS2-9330SE	3" x 30 Ft	60000	143.80

## WARNING!

- DO NOT USE A DAMAGED TOW STRAP
- DO NOT TIE KNOTS IN STRAPS
- DO NOT USE FOR OTHER APPLICATIONS
- DO NOT USE ON SHARP EDGES
- DO NOT ATTACH TO BUMPERS
- DO NOT USE UNTIL INSPECTED
- DO NOT USE IN AREAS WHERE TEMPERATURES EXCEED 194° F (90°C)