


EDjunior Dynamometer Specifications

DILLON

Capacity x Resolution				Body Construction and Overload Design
EDjr-1T (EDjr-2.5K)	2,500 lbf x 2	1,000 kgf x 1	10,000 N x 10	Aircraft quality 2024 Aluminum 700% Ultimate overload protection
EDjr-2T (EDjr-5K)	5,000 lbf x 5	2,000 kgf x 2	20,000 N x 20	
EDjr-5T (EDjr-10K)	10,000 lbf x 10	5,000 kgf x 5	50,000 N x 50	
EDjr-10T (EDjr-25K)	25,000 lbf x 20	10,000 kgf x 10	100,000 N x 100	E4340 Alloy Steel 500% Ultimate overload protection

Note: Model in parenthesis shows U.S. convention for describing capacities.

Dimensions <i>Dimensions shown are nominal and subject to tolerances</i>											
Model		A	B	C	D	E	F	G	H	I	J
EDjr-1T	inch	8.4	5.0	6.9	0.75	0.50	11.6	10.8	1.20	2.03	1.16
	mm	213	127	174	19	13	296	274	30	52	29
EDjr-2T	inch	10.6	5.0	7.8	1.06	0.75	14.8	13.4	1.41	2.94	1.69
	mm	269	127	198	27	19	375	340	35	75	43
EDjr-5T	inch	11.4	5.3	8.1	1.38	1.00	17.8	15.8	2.22	4.03	2.28
	mm	289	135	206	35	25	451	402	56	102	58
EDjr-10T	inch	11.5	5.3	7.9	1.97	1.38	21.6	18.8	3.67	4.53	3.25
	mm	291	133	201	50	35	548	478	93	115	83

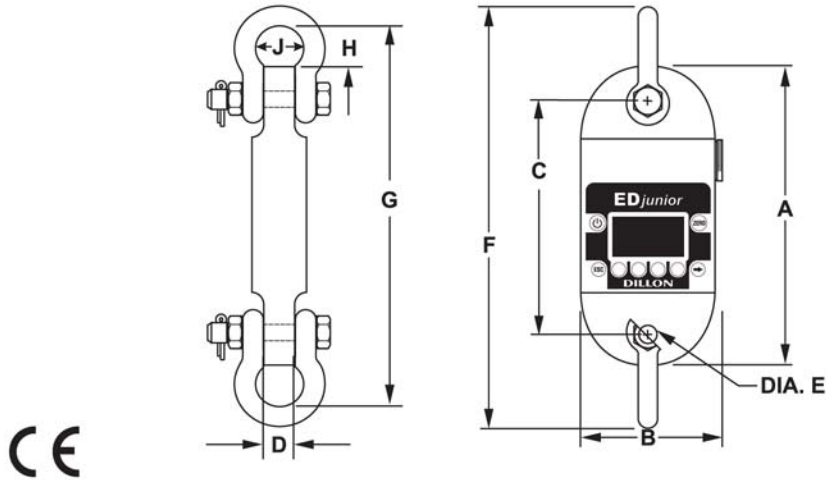

Distributed By

M^cLaughlin Hoist & Crane

1850 Larkin Williams Rd.
Fenton, MO 63026
(636)343-9700
www.stlcrane.com

EDjunior Electronic Dynamometer

Enclosure: Designed to NEMA4X/IP55.
Suitable for continuous outdoor use.

Accuracy: 0.2% of capacity.

Repeatability: 0.2% of capacity.

Proof Load: 150% of capacity.

Ultimate Overload: See table on reverse.

Safe Overload: 200%

Display: 128 x 64 dot-graphic LCD display shows all digits 1.0" (26 mm) high plus annunciators and softkeys.

Display Update Rate: 2 times per second.

Peak Hold Sampling Rate: 2 times per second typical.

RS-232 Communication: Not available.
See Dillon EDxtreme.

Calibration: Traceable to the National Institute of Standards and Technology. Calibration card included.

Battery Life: 320 hours typical use with two C-cell alkaline batteries.

Operating Temperature: -4° F to 140° F (-20° to 60° C)

Included with Instrument: Batteries, manual and calibration card.

Optional Accessories: Carry case.

Weights			
Model	Unit Weight	Weight with Shackles	Approx. Shipping Weight
EDjr-1T	lb	2.9	3.9
	kg	1.3	1.8
EDjr-2T	lb	4.5	7.8
	kg	2.0	3.9
EDjr-5T	lb	6.4	14.3
	kg	2.9	6.5
EDjr-10T	lb	17.0	41
	kg	8.2	19

Improved performance, convenience and features are available from the EDjunior's big brother, the EDxtreme.
See EDxtreme Electronic Dynamometer brochure and specifications for details.



DILLON

**Overload Protection and
Overhead Weighing Equipment**

a division of Avery Weigh-Tronix
Fairmont, MN U.S.A.

Toll-Free: 800-368-2031

Phone: 507-238-4461

Fax: 507-238-8258

www.dillon-force.com

